




MOTOCRANE RADICAL



The Motocrane **RADICAL** was designed from the ground up to excel on rough terrain, at high speeds and even on the water. With a standard payload capacity of 35lbs and a 45lbs payload with the heavy lift, MotoCrane RADICAL is tailored for the latest compact stabilized heads/gimbals. The RADICAL Isolator features familiar 3-axis passive dampening for Pitch, Roll and Z-axes, which dual hydraulic dampers for Pitch and Roll axis with an adjustable air shock for Z-axis. RADICAL features a modular design for easy transportation, assembly, and storage. Available **INS 2 Advanced Stabilization** allows RADICAL to maintain Lift axis angle with accuracy that rivals systems 10-20x the cost. This is especially important for off-road applications where the lens needs to “float” over terrain with the subject.



SPEC SHEET

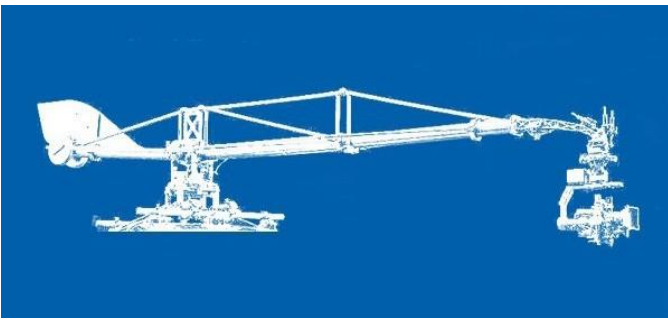

SPECS	
Max Payload	16 - 20kg
Max Length	3.66m
Overall Extended Length	5.03m
Max Pan Speed	6 sec/360°
Max Tilt Speed	2 sec/70°
Pan Limit	Unlimited swing rotation
Tilt Limit	- 35°, + 35°
Adjustable Length	No
Telescopic	No
Weather Proof	Yes

RADICAL

Incl 12vPower + bnc video for wireless teradek

FLIGHTHEAD MINI V4 GPS, incl:

- Zoom motor
- Spare zoom motor
- Shake generator
- Joystick control
- Wheels control
- Camera power cables
- XLR to D-Tap cables

ZERO RAINDEFLECTOR

- Incl power
- Incl spare glasses

PORSCHE CAYENNE

MONITORS

- 2x 17" TV logic monitors
- 2x 9" High bright TV logic monitors
- Incl focus assist and waveform
- 1x 5" High bright TV logic monitor

PLAYBACK DEVICE

PIX EX-7 incl Harddrive


INTERCOM

- Digital wireless Clearcom system
- 5 beltpacks
- 3 earpieces
- Speaker

- 12V & 24V STABILISED CAMERA POWER
- 36V STABILISED HEAD POWER
- MULTIPLE 12V OUTPUTS
- MULTIPLE BNC VIDEO OUTPUTS

DIMENSIONS

MOTOCRANE RADICAL

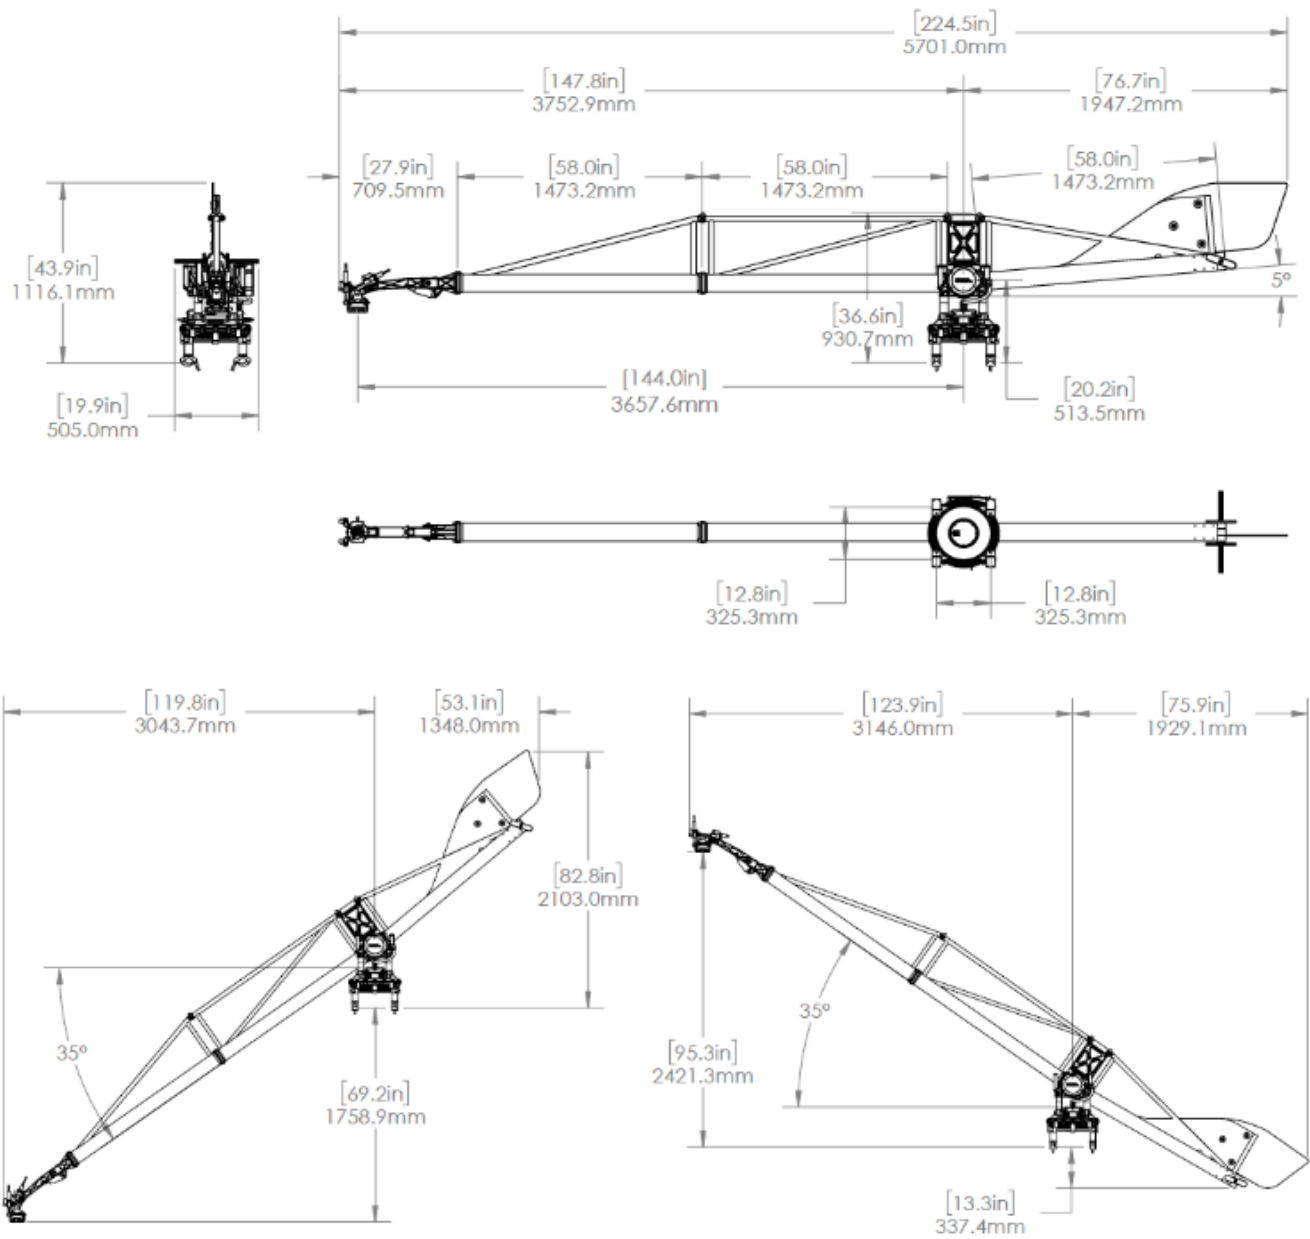



PARKING

MOTOCRANE RADICAL



private covered parking with plug
3,00m width (2,20m)
8,00m length (8,00m)
3,00m height (3,00m)